



1. Warranty
2. Pump Table 4
3. Selection Guide
4. C & D Pattern Windmills
5. Windmill Pumps10
6. Packing Tubes11
7. Pump Buckets12
8. Tank Stands
9. Floats
10. Wheel Assembly
11. Overhaul Kits C Pattern
12. Parts Illustration C Pattern 17-18
13. Overhaul Kits D Pattern19
14. Parts Illustration D Pattern
16. Mill Rods & Connections
17. Pump Rods & Connections
18. Clamps

Disclaimer: Prices quoted are exclusive of GST and Freight.

Prices are correct at the time of printing but are subject to change without notice. Comet Windmills Australia will endeavour to send out new price sheets of products that change in price to include in your pricebook. If you are unsure or if you require large quantities we are more than happy to provide a special quote for your needs.



#### COMET WINDMILLS-ONE (1) YEAR

This conditional guarantee is valid <u>onlv</u> if the following details are adhered to. All parts received are to be checked off and accounted for within 7 days of receipt. Any claims for missing or damaged parts are to be notified within 7 days. Accounts are to be paid in full within 30 days from the date of the Tax Invoice supplied from Comet unless otherwise negotiated. Comet Windmills Australia is not responsible for the erection or installation of the mill, bore, pump or spare parts. The company manufactures and supplies genuine Comet Parts only. Comet will recommend an installer or mechanic only, but it is the responsibility of the Buyer to make the arrangements, pay for costs involved with erection/installation and ensure products are erected in accordance with manufacturers instructions. Comet Products are supplied based on the information given. The Buyer must also ensure that the manufacturers instructions are followed and that the parts are stored in a manner that will not cause the parts to rust, erode, wear or be damaged if not erected when received. This guarantee will be voided if non-Genuine parts have been used or any alterations, modifications, welding or machining has been done to original parts or on parts used to replace genuine parts.

All Comet Windmill Genuine Parts have a conditional One (1) year warranty. The company guarantees that the Comet Windmill will do all that it claims provided the pumping and wind conditions are in accordance with those specified on the Comet Pumping Table; it is properly erected on a Comet Tower in the manner described in the company's Erecting Instructions on foundations which in the Company's opinion are satisfactory; and that oiling, adjustments and maintenance have been properly attended to according to the Company's recommendations. Comet Windmills Australia only supplies products based on the information that has been supplied by the Buyer. It holds no responsibility for incorrect information or incorrect site details supplied. The company will endeavour to obtain as much information as necessary for it to identify the most suitable equipment and size.

Comet will repair or replace at its discretion any defective parts of the windmill which the company has been notified of within the 1 year period from the date of purchase provided prior approval by an authorised staff member. The defective part must be returned for inspection with all transport and other charges pre-paid.

This guarantee shall be modified if the windmill is not protected from the weather before erection and if it is not erected within three (3) months from the original date of despatch by the company. In such cases it would be necessary for special arrangements to be made with the company at its discretion.

#### OTHER COMET PRODUCTS-ONE (1) YEAR

All other standard Comet products are guaranteed under the same conditions as are Comet Windmills, excepting that the free supply period and the time for lodgement of claim is ONE YEAR. These guarantees shall not extend to cover labour and other costs incurred without the company's authority, damage caused by transport to site, consequential damage, damage caused by negligence, alteration or misuse, damage caused by fire, flood, storm surge, the action of sea, tidal wave, high water or tsunami, war or warlike activity, lawful destruction, erosion, damage, loss or injury that you or anyone acting for you deliberately caused, loss, damage or liability that does not occur within the period of warranty cover.

#### **Conditions**

The warranty does not cover alteration, improper installation, misuse, abuse or neglect on the part of the owner or installer. Warranty is also invalid in any case that the product is altered, modified or installed with non genuine parts—ensure your warranty is registered and valid by filling out your warranty registration on the following page and return to Comet Windmills Australia, PO Box 340, Macksville, NSW 2447. Do not return without speaking to a staff member first. Non return will void your warranty.

#### WARRANTY ONLY APPLIES TO GENUINE COMET PARTS WITH PROOF OF PURCHASE.



# **PUMPING TABLE**

After numerous pumping tests against other makes of mills, the founders, Sidney Williams & Co, were so confident about the superiority of the Comet that in 1934 they published a challenge, which has never been accepted over 125 years. The challenge was: 'Install a Comet and any other standard mill of the same size adjacent to it so that both mills work under identical pumping and wind conditions and if, after a period of three months trial, the Comet does not pump at least 25% more water we will remove it at no cost to you.'

The pumping capacities of Comet Mills, shown in the Table, are based on the number of pumping strokes (total inches) in 12-14 k.m.p.h winds blowing an average 24 hours and **also allow for slip/friction**. However, the pump sizes and elevations are such that with balanced pump rods and free pressure sealing devices the mills will start pumping in light breezes of under 8 m.p.h. (12.8 k.m.p.h).

			ne	epress	sures	sealing c	ievice	estnem	IIIS W	in start p	umpii	ig in ligr	lubre	ezesoit	inder	°8 m.p.n	. (12.	ок.ш.р.	.n).			
PUMP SIZE Inches mm		Bft 44m gal L		Oft 05m gal L		12ft .66m gal L		14ft .27m gal L		16ft .88m gal L		18ft .49m gal L		20ft .10m gal L		22ft 5.71ft gal L		24ft .32m gal L		27ft 3.23ft gal L		30ft .14m gal L
1¾ 44	95 29	800 3640	160 49	850 3860	220 67	870 3960	310 95	960 4360														
2 50	75 22	1060 4820	130 40	1120 5090	175 53	1130 5140	250 76	1260 5730	320 98	1800 8180	410 125	1360 7410										
2¼ 57	60 18	1340 6090	105 32	1420 6460	140 43	1430 6500	200 61	1590 7230	265 81	2290 10410	350 107	2070 9410	480 146	2300 10460								
2½ 65	52 16	1650 7500	85 26	1750 7960	120 37	1770 8050	170 52	1960 8910	220 67	2830 12870	300 91	2550 11590	415 126	2850 12960	500 152	2550 11590	650 198	2830 12870				
2¾ 70	45 14	2000 9090	72 22	2130 9680	100 31	2150 9770	140 43	2380 10820	190 58	3430 15590	250 76	3100 14090	360 110	3450 15680	430 131	3100 14090	570 174	3430 15590	218	3800 17280	985 300	3360 15280
3 80	38 12	2380 10820	60 18	2500 11370	85 26	2550 11590	120 37	2830 12870	160 49	4080 18550	210 64	3680 16730	305 93	4100 18640	380 116	3680 16730	490 149	4080 18550	620 189			3950 17960
3¼ 83	32 10	2800 12730	50 15	2950 13410	72 22	3000 13640	105 32	3300 15000	135 41	4780 21730	180 55	4300 19550	260 79	4800 21820	325 99	4300 19550	430 131	4780 21730	520 158	5100 23190	650 198	4650 21140
3½ 90	28 9	3250 14780	45 14	3450 15680	63 19	3450 15680	90 27	3850 17500	118 36	5550 25230	155 47	5000 22730	225 69	5600 25460	280 85	5000 22730		5550 25230	470 143	5900 26820		5400 24550
4 100	22 7	4200 19090	35 11	24090	78 24	5600 25460	116 35	6100 27730	162 49	8400 38190	216 66	7530 34230	298 91	8820 40100	350 107	8250 37510		9100 41370	613 187	9100 41370		8260 37550
4¼ 108	31 10	5750 26140	51 16	5950 27050	70 21	6300 28640	103 31	6800 30910	143 44	9500 43190	192 59	8450 38410	264 81	10000 45460	317 97	9330 42410		10350 47050	555 169	10250 46600		9320 42370
4½ 114	25 8	6450 29320	46 14	6650 30230	61 19	7100 32280	91 28	7700 35000	128 39	10700 48640	165 50	9550 43190	231 70	11200 50920	269 82	10400 47280		11500 52280	490 149	11400 51830		10450 47510
5 127	21 6	7500 34100	38 12	8250 37510	49 15	8700 39550	75 23	9500 43190	103 31	13200 60000	130 40	11750 53420	168 51	13750 62510	214 65	12850 58420	278 85	14200 64550	392 120	14200 64550		12900 58640
6 152	15 5	10500 47730	27 8	11500 52280	33 10	12600 57280	50 15	13700 62280	69 21	19000 86370	87 27	16900 76830	116 35	19800 90010	151 46	18500 84100	191 58	20550 93420	265 81	20400 92740		18550 84330
7 178			18 6	1550 70460	25 8	17050 77510	35 11	19750 89780	48 15	25650 116610	65 20	23000 104560	85 26	26300 119560	90 28	31500 143200	143 44	28000 127290	198 60	27800 126380	160 79	25300 115010
8 200					18 6	22400 101830	27 8	25650 116610	36 11	33850 153880	50 15	29900 135930	65 20	34000 154560	70 21	40300 183200	110 34	35900 163200	150 46	36400 165480	200 61	32800 149110

How to Use: Select the amount of water you want pumped on a daily basis in the highlighted column and/or the total head measurement and match to the closest value.

This Table is based on the minimum quantities guaranteed in normal light wind conditions over a 24 hour day. Comet mills will start turning in breezes lighter than 8 m.p.h (12.8 k.m.p.h). The pump sizes, elevations and capacities in this Table would be greater if they were based on the mills starting in stronger winds, as are generally the tables for other mills. The reason is that the starting torque of the wheel varies roughly as the square of wind speed; thus a 14 m.p.h (22 k.m.p.h) wind should develop four times as much torque as a 7 m.p.h (11 k.m.p.h) breeze.

# Also, the higher daily capacities stated in other tables are obviously calculated on stronger winds of longer duration and shorter distances. The wind conditions for the Comet Table are more usual and therefore preferable.

The notes on The Selection Guide should be read before making use of the Comet Pumping Table. The Comet Pumping Table is a Guide only.





Your first cost is your last cost with a Comet. Quality is always remembered long after the price is forgotten.



# SELECTION GUIDE

Particulars Required For Design & Installation

#### INSTRUCTIONS

It is very important that you provide as much information as possible and supply accurate measurements so that the most efficient and least expensive pumping plant can be recommended to suit your requirements.


First choose the diagram that is most similar to your proposed site and pumping conditions. Answer the general data questions with accurate measurements and include pumping details. If you need a Mill Head only then refer to pages overleaf on Comet Mill Heads on Southern Cross Towers/3 p -Post Towers.

Photocopy this page to record your details and measurements.

Winds—The Winds, especially the light breezes, must have free access to the mill from all directions. The bottom of the wheel must be at least 15ft (14 metres) above all wind obstructions within 150yds (137 metres) of the mill. Comet pumping capacities are based on average medium winds of 12 to 14 m.p.h (19-22 k.m.p.h) blowing for 10 hours daily.

Elevations—The mill should be loaded and balanced so that it will start pumping in light breezes. Its size depends upon the size of the pump and total elevation. The latter includes not only the vertical heights for suction and delivery elevations but also an allowance for probable water flow friction in pipeline. The delivery pipe size should be at least half the pump diameter.

Suction-Inabore or well it is best to c submerge the pump. For a creek or dam the pump should be placed close to the water and the suction elevation must not exceed 22ft (7m), or less if the suction pipeline is long.

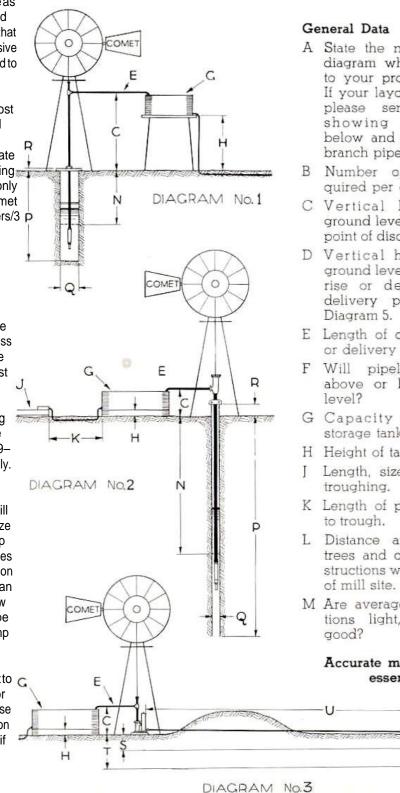

# COMET MILL PLANT DIAGRAMS

- A State the number of the diagram which is similar to your proposed layout. If your layout is different, send a sketch dimensions below and details of any branch pipelines.
- Number of gallons required per day.
- C Vertical height from ground level at mill site to point of discharge.
- D Vertical heights from ground level at mill to any rise or depression in delivery pipeline - see
- E Length of discharge pipe or delivery pipeline.
- F Will pipeline be laid above or below ground
- G Capacity and type of storage tank.
- H Height of tankstand.
- J Length, size and type of
- K Length of pipe from tank
- L Distance and height of trees and other wind obstructions within 150 yards
- M Are average wind conditions light, medium or

#### Accurate measuring is essential.





COMET

C

# SELECTION GUIDE

Particulars Required For Design & Installation

### COMET MILL PLANT DIAGRAMS

#### Pumping from Bores or Wells


- N Distance from ground level to lowest water level during pumping test.
- O Gallons pumped per hour during test.
- Depth from ground level P to bottom of bore or well.
- Q Outside diameter of bore casing or size of well.
- R Height of top of casing or well above ground.

#### Pumping from Creeks, Earth Tanks, Dams or Shallow Wells

- S Vertical height from normal water level to ground level at mill site.
- T Vertical height from lowest water level to ground level at mill site.
- U Length of suction pipe from footvalve to pump.
- V Vertical height above pump inlet of any unavoidable rise in suction pipeline.

#### Comet Mills on Other Towers

- Size of pump in use. 1
- 2 Type of pump.
- 3 Size of delivery pipe.
- 4 Condition of pipes.
- 5 and details of tower — see Particulars Folder.

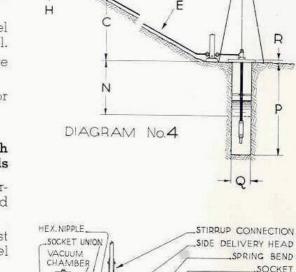


#### SOCKET DELIVERY PIPELINE\_ RETENTION VALVE PLAIN NIPPLE\_ SOCKET UNION AIRCHAMBER.


TYPICAL SYPHON PUMP INSTALLATION SHOWING FITTINGS DISCONNECTED **COMET MILL HEADS ON** OTHER TOWERS


The COMET Mill is often fitted to other makes of towers, even though it is not then covered by our guarantee. Please measure tower carefully and answer the relevant questions below. It is also important to supply all particulars of the pumping conditions, especially those in reference to sizes of existing pump, pipe etc. See Overleaf for more details.

Make of existing Mill	
Size of existing Mill	
Height of existing tower	
Number of legs (3 or 4)	
Are legs 60° or 90° angle	
A Spread of legs at tower cap	
B Distance - cap to platform	
C Spread of tower at platform	
D Width of angle steel leg	
E Thickness of flange	
F Distance from cap to bend	
G Spread of tower at bend	
H Spread 4ft below bend	



#### State type No. of your tower\_



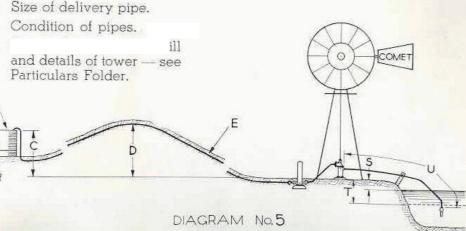

Type No. 1





### WINDMILL CODES

MAA	8ft	
MBB	10ft	C Pattern
MAB	8-10ft*	
MOO	4 0 4 4	

MCC	12ft	
MDD	14ft	C Pattern
MCD	12-14ft*	

### **D** Pattern Windmills

MQQ	16ft	
MRR	18ft	D Pattern
MQR	16-18ft*	
MSS	20ft	
MTT	<b>22ft</b>	D Pattern
MST	20-22ft*	
MUU	24ft	
MVV	27ft	
MWW	30ft	D Pattern
MUW	24-30ft*	
MVW	27-30ft*	

\* Parts with these codes means that the parts are interchangeable with that size range. All other parts are specific for that size.



# WINDMILL SYSTEMS

DIRECT ACTING WINDMILLS AND TOWERS

#### 'C'PATTERN&14FT WHEEL DIAMETER

#### 6-14FT WINDMILLS on a 4-POST TOWER

CODE	SIZE		TOWER	SIZE	
		20ft	30ft	40ft	50ft
COM1001SS	8ft	\$ 7,000	\$ 7,500	\$ 7,900	
COM1002SS	10ft	\$ 7,500	\$ 7,900	\$ 8,400	
COM1003SS	12ft	\$ 9,000	\$ 9,500	\$ 10,500	\$ 10,900
COM1004SS	14ft		\$ 11,800	\$ 12,500	\$ 13,400

#### 8-14FT WINDMILL HEADS

#### **TO SUIT 4-POST TOWERS**

COM1001	MA 2.4m (8ft) Windmill Head for 4-Post Tower	\$ 5,200
COM1002	MB 3.0m (10ft) Windmill Head for 4-Post Tower	\$ 5,700
COM1003	MC 3.6m (12ft) Windmill Head for 4-Post Tower	\$ 7,500
COM1004	MD 4.2m (14ft) Windmill Head for 4-Post Tower	\$ 8,900

All Windmills include Standard Safety Package (timber platform & ladder upgrade)

### 'D'PATTERN16-22FT WHEEL DIAMETER

#### 16-22FT WINDMILLS on a 4-POST TOWER

CODE	SIZE		TOWER SIZE						
		30ft	40ft	50ft	60ft				
COM1037SS	16ft	\$ 22,400	\$ 24,400	\$ 25,400					
COM1038SS	18ft	\$ 22,500	\$ 24,600	\$ 25,600					
COM1039SS	20ft		\$ 28,500	\$ 30,400					
COM1040SS	22ft		\$ 28,600	\$ 30,500					

#### **16-22FT WINDMILL HEADS**

#### TO SUIT 4-POST TOWERS

COM1037	MQ 4.9m (16ft) Windmill Head for 4-Post Tower	\$ 17,800
COM1038	MR 5.5m (18ft) Windmill Head for 4-Post Tower	\$ 17,850
COM1039	MS 6.0 (20ft) Windmill Head for 4-Post Tower	\$ 22,900
COM1040	MT 6.7 (22ft) Windmill Head for 4-Post Tower	\$ 23,000

Sizes 24ft, 27ft and 30ft are also available—POA for more power and water

#### SAFETY UPGRADES FOR TOWERS (3-POST AND 4-POST)

To Suit Existing Towers (Galvanised steel platform with non-slip grate floor, perimeter toe plate, & ladder)

Safety First Platform and Ladder Upgrade

\$ 780





# WINDMILL PUMPS FLUSH END CYLINDER PUMP

with pinned Plunger Rod for extra strength and stability

SIZES: 1¾" - 6"

#### FLUSH END PUMPS

CODE	SIZE	SUCTION	DISCHARGE	STROKE	ROD	PRICE
COM1077	1¾	25mm	40mm	12	1/2"	\$ 360
COM1078	2	32mm	40mm	12	1/2"	\$ 380
COM1079	2¼	32mm	40mm	12	5/8"	\$ 390
COM1080	21⁄2	32mm	40mm	12	5/8"	\$ 450
COM1081	2¾	40mm	50mm	12	5/8"	\$ 480
COM1082	3	40mm	50mm	12	5/8"	\$ 490
COM1083	3¼	50mm	50mm	12	5/8"	\$ 510
COM1084	31⁄2	50mm	50mm	12	3/4"	\$ 680
COM1085	4	50mm	65mm	12	<sup>3</sup> /4"	\$ 790
COM1086	41⁄2	65mm	80mm	12	3⁄4"	\$ 1,190
COM1087	5	65mm	80mm	12	3⁄4"	\$ 1,290
COM1088	6	65mm	80mm	12	1"	\$ 1,490

The feature of Flush End Pumps are that the end caps are fitted flush with the outside of the barrel, enabling the maximum size of pump to be used in a given size of bore. Pumping from wells or shallow bores is the ideal application for the range of high quality, economical Comet Flush End Pumps. Comet Pumps are quality hand-made pumps for longer service. Pump construction of gun-metal and bronze and leather buckets ensures constant efficiency and satisfactory pumping in hard waters at total elevations of up to 200 feet.

# **HEAVY DUTY DRAW PLUNGER PUMPS**

SIZES: 2" - 4¼"

STAINLESS STEEL SLEEVE VALVE DRAW PLUNGER PUMPS										
CODE	SIZE inches	SUCTION	DISCHARGE	STROKE	ROD	PRICE				
COM1108	2	32mm	65mm	24	5/8"	\$ 1,280				
COM1109	2¼	32mm	65mm	24	3/"	\$ 1,390				
COM1110	21⁄2	40mm	80mm	24	3⁄4"	\$ 1,480				
COM1111	2¾	40mm	80mm	24	3/4"	\$ 1,490				
COM1112	3	50mm	100mm	24	3⁄4"	\$ 1,520				
COM1113	3¼	50mm	100mm	24	7/8"	\$ 1,880				
COM1116	4¼	65mm	125mm	24	1"	\$ 2,490				

Sleeve Valve Pictured

COMPT

**Bronze Ball Valve and Mushroom Valve available by special order** Prices quoted are exclusive of GST and Freight.



## WINDMILL PUMPS

# **SYPHON PUMP** — vertical discharge

SIZES: 2" - 6"

#### VERTICAL DISCHARGE SYPHON PUMPS



VERTICAL DISCHARGE STEHON FOMFS										
CODE	SIZE	SUCTION	DISCHARGE	STROKE	ROD	PRICE				
COM1117	2	32mm	50mm	12	5/8"	\$ 900				
COM1118	2¼	32mm	50mm	12	5/8"	\$ 950				
COM1119	21⁄2	32mm	50mm	12	5/8"	\$ 985				
COM1120	2¾	40mm	50mm	12	5/8"	\$ 1,035				
COM1121	3	40mm	50mm	12	5/8"	\$ 1,140				
COM1122	3¼	50mm	80mm	12	3/4"	\$ 1,200				
COM1123	31⁄2	50mm	80mm	12	3/4"	\$ 1,280				
COM1124	4	50mm	80mm	12	3/4"	\$ 1,420				
COM1125	41⁄2	50mm	80mm	12	7/8"	\$ 1,680				
COM1126	5	80mm	80mm	12	7/8"	\$ 1,980				
COM1127	6	80mm	80mm	12	7/8"	\$ 2,270				

# **SYPHON PUMP** — side discharge

SIZES: 2" - 6"

SIDE DISCH	SIDE DISCHARGE SYPHON PUMPS										
CODE	SIZE	SUCTION	DISCHARGE	STROKE	ROD	Packing Tube	Ex GST				
COM1128	2	32mm	40mm	12	5/8"	32mm	\$ 990				
COM1129	2¼	32mm	40mm	12	5/8"	32mm	\$ 1,070				
COM1130	21⁄2	32mm	40mm	12	5/8"	32mm	\$ 1,090				
COM1131	2¾	40mm	40mm	12	5/8"	32mm	\$ 1,220				
COM1132	3	40mm	40mm	12	5/8"	32mm	\$ 1,240				
COM1133	3¼	50mm	50mm	12	3/4"	40mm	\$ 1,390				
COM1134	3½	50mm	50mm	12	3/4"	40mm	\$ 1,460				
COM1135	4	50mm	50mm	12	3/4"	40mm	\$ 1,580				
COM1136	4½	65mm	65mm	12	7/8"	40mm	\$ 1,810				
COM1137	5	65mm	65mm	12	7/8"	45mm	\$ 2,490				
COM1138	6	80mm	80mm	12	7/8"	45mm	\$ 2,800				



# WINDMILL PUMPS

#### **VERTICAL & SIDE**



PLUNGER ASSEM	BLY		STROKE		
CODE	SIZE	8"	10"		12"
COM111728PA	2	POA	POA	\$	79.00
COM111829PA	<b>2</b> <sup>1</sup> / <sub>4</sub>	POA	POA	\$	89.00
COM111930PA	<b>2</b> <sup>1</sup> / <sub>2</sub>	POA	POA	\$	96.00
COM112031PA	<b>2</b> <sup>3</sup> / <sub>4</sub>	POA	POA	\$	115.00
COM112132PA	3	POA	POA	\$	125.00
COM112233PA	3¼	POA	POA	\$	136.50
COM112334PA	<b>3</b> <sup>1</sup> / <sub>2</sub>	POA	POA	\$	147.90
COM112435PA	4	POA	POA	\$	192.80
COM112536PA	<b>4</b> <sup>1</sup> / <sub>2</sub>	POA	POA	\$	269.90
COM112637PA	5	POA	POA	\$	355.80
COM112738PA	6	POA	POA	\$	389.50
		TDONG:		•	•

# EXTRA STRONU

	81				
		l		ł	
				-	
				l	
1				2	
				3	
			9		
1			8		
1			8		
			2		
1			2		
ł			l		
1			1		
I			1		
1			1		
H					
ł					

INTERMEDIATE FLANGE, BARREL		STROKE	
& BOTTOM CAP ASSEMBLY	8"	10"	12"
COM111728FBA 2	POA	POA	\$ 299.00
COM111829FBA 2¼	POA	POA	\$ 333.00
COM111930FBA 2½	POA	POA	\$ 350.00
COM112031FBA 2 <sup>3</sup> / <sub>4</sub>	POA	POA	\$ 402.00
COM112132FBA 3	POA	POA	\$ 437.00
COM112233FBA 3¼	POA	POA	\$ 489.00
COM112334FBA 3 <sup>1</sup> / <sub>2</sub>	POA	POA	\$ 520.00
COM112435FBA 4	POA	POA	\$ 589.00
COM112536FBA 4 <sup>1</sup> / <sub>2</sub>	POA	POA	\$ 610.00
COM112637FBA 5	POA	POA	\$ 690.00
COM112738FBA 6	POA	POA	\$ 801.00



### **PUMP PARTS**

### **PACKING TUBES**

#### Why COMET Windmills Are More Suitable For The Use of Packing Tubes

Comets' direct acting windmills have a distinct advantage over geared windmills by means of unique adjustable weights on the wheel arms to counter-balance the upthrust of the working parts and rods. This is not possible for geared mills as they require 4-7 turns for each pump stroke. This is the reason why Comet Windmills are suited to the packing tube principle and are known as 'Australia's Leading Mill'.



Sizes: 1	1⁄4" - 2				
PACKING T	UBES				I
CODE	SIZE	ROD	STROKE	Minimum	PRICE
	inches	inches	mm/in.	<i>Pipe Size</i> mm/in.	ex GST
COM1139	1¼	5⁄8	300 - 12	40 - 1½"	\$ 196.00
COM1140	1¼	5⁄8	400 - 16	40 - 1½"	\$ 196.00
COM1141	11⁄2	3/4	300 - 12	50 - 2"	\$ 235.00
COM1142	11⁄2	3/4	400 - 16	50 - 2"	\$ 240.00
COM1143	1¾	7⁄8	300 - 12	65 - 2½"	\$ 255.00
COM1144	1¾	7⁄8	400 - 16	65 - 2½"	\$ 260.00
COM1145	2	1	300 - 12	80 - 3"	\$ 290.00
COM1146	2	1	400 - 16	80 - 3"	\$ 320.00

### TO SUIT SX SYPHON PUMPS

PACKING	TUBE ADA	PTORS	
CODE	Packing	Column	
	Tube ID	Pipe	
COM1147	1¼	11⁄2	\$ \$
COM1148	11⁄2	2	\$ \$
COM1149	1¾	<b>2</b> <sup>1</sup> / <sub>2</sub>	\$ \$





	Quality made plunger assembly, double pinned coupling with
nger:	two inverted cup leathers providing a reliable water seal.

Prices quoted are exclusive of GST and Freight.

ROD SOCKETS		
CODE	SIZE	
COM1226	5/8	\$ 18.00
COM1227	3/4	\$ 20.00
COM1228	7/8	\$ 22.00

<sup>1</sup>¼ - 1½ - 2" BSP

otherito



# **PUMP PARTS**

	CODE	SIZE		Pł	RICE	
	HAT WASHE					
	COM1160	5/8"		\$	26.00	
	COM1161	3/4"		\$	27.00	
	COM1162	7⁄8"		\$	29.00	
ong-Life	LEATHER PL	IMP BUCK	ET			
ong-L''	COM1165	32mm	1¼"	\$	6.00	
	COM1166	40mm	11⁄2"	\$	7.00	
A SALE AND A	COM1167	45mm	1¾"	\$	7.80	
	COM1168	50mm	2"	\$	8.00	
	COM1169	57mm	21/4"	\$	8.80	
	COM1170	65mm	21/2"	\$	9.80	
	COM1171	70mm	2¾"	\$	10.50	
	COM1172	80mm	3"	\$	11.00	
	COM1173	82mm	31⁄4"	\$	12.50	
	COM1174	90mm	31⁄2"	\$	13.50	
	COM1175	95mm	3¾"	\$	14.00	
	COM1176	100mm	4"	\$	15.00	
	COM1177	106mm	4¼"	\$	17.00	
	COM1178	115mm	41⁄2"	\$	19.00	
	COM1179	125mm	5"	\$	24.00	
	COM1180	130mm	51⁄4"	\$	36.00	
	COM1181	150mm	6"	\$	44.00	
		MPOSITION	N PUMP BUCKET			
	COM1185	32mm	11/4"	\$	12.50	
	COM1185	40mm	11/2"	چ \$	12.50	
	COM1187	45mm	172 13⁄4"	\$ \$	12.90	
	COM1188	43mm 50mm	2"	\$ \$	14.80	
	COM1189	57mm	2 2¼"	\$ \$	15.00	
	COM1199	65mm	21/2"	\$	15.30	
	COM1190	70mm	2 <sup>72</sup> 2 <sup>3</sup> /4"	\$	15.40	
	COM1191 COM1192	80mm	3"	چ \$	16.00	
	COM1192	82mm	3 3¼"	\$	16.40	
	COM1193	90mm	3½"	\$ \$	16.40	
	COM1194 COM1195	95mm	3 <sup>3</sup> /4"	چ \$	16.60	
	COM1195 COM1196	95mm 100mm	4"	چ \$	16.80	
	COM1190	106mm	4 4¼″	چ \$	17.00	
	COM1197 COM1198	115mm	474 4½"	چ \$	17.10	
	COM1198	125mm	472 5"	چ \$	18.00	
	COM1199 COM1200	125mm 130mm	5 5¼"	۶ ۶	55.00	
			574 6"			
	COM1200A	150mm 175mm	6 7"	\$ ¢	56.40	
	COM1201	175mm 200mm		\$ ¢	68.70 77 70	
	COM1202	200mm	8" 10"	\$ ¢	77.70	
	COM1203	250mm	10" 12"	\$ ¢	86.00	
	COM1204	300mm	12"	\$	99.50	

# COMPARE THE QUALITY

Prices quoted are exclusive of GST and Freight



Large or small hole optional

'Lo



# TANK STANDS

#### TYPE 'S' TANKSTAND


(splayed legs)

The COMET Steel Tankstand is the ideal structure for supporting a water storage tank which needs to be elevated for a pressure supply. When properly erected on correct foundations COMET Tankstands withstand wind gales with safety. Designed so that accuracy and ease of assembly are assured, most holes have only 1/32 inch clearance for the bolts. Heavy steel footplates are welded to angle steel leg sections. The diagonal braces are flat steel bars, crossed in pairs so that they safely transfer the tensile loads imposed by winds from any direction. The bearers, joists and decking for COMET Tankstands are specially selected timber of the strongest and most durable species. Sizes are to individual requirements.

### TYPE 'P' TANK

(parrallel legs)


GALVANISED STEEL or HARDWOOD DECK

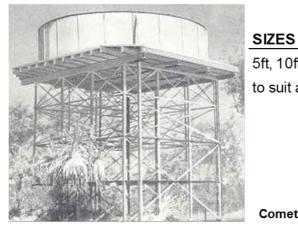

5ft, 10ft, 20ft, 30ft heights

to suit any specified tank volume

Comet Type 'P' Tankstand

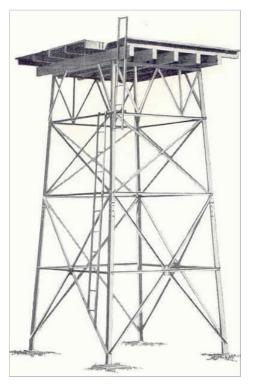

Comet Type 'S' Tankstand



### **FULLWAY FLOATVALVES**

CODE	DESCRIPT	TION						
TYPE 'H' F	ULLWAY	LOW PRES	SSURE FLO	OATVALV	ES	Pl	RICE	
	inches							
COM1420	1	Type 'H' Lo	w Pressure	Floatvalve		\$	190.00	
COM1421	11⁄4	Type 'H' Lo	w Pressure	Floatvalve		\$	210.00	
COM1422	11/2	Type 'H' Lo	w Pressure	Floatvalve		\$	260.00	
COM1423	2	Type 'H' Lo	w Pressure	Floatvalve		\$	290.00	
COM1424	<b>2</b> <sup>1</sup> / <sub>2</sub>	Type 'H' Lo	w Pressure	Floatvalve		\$	440.00	
COM1425	3	Type 'H' Lo	w Pressure	Floatvalve		\$	880.00	
COM1426	4	Type 'H' Lo	w Pressure	Floatvalve		\$	980.00	
	•	s large as th						
		s hinge pin p			-			
• •	-	the float can						-
COMET FIO	atvalves are	e suitable for	pressures	to 20 feet he	ead. 21/2 - 4"	suitable	e for Conc	rete Troughs.
TYPE 'E' P	IGH PRES	SURE FLC						
	inches		r use in bot		Concrete	Trouahi	na	
COM1427	1¼		gh Pressure			\$	28.00	
COM1428	11/2		gh Pressure			\$	320.00	
COM1429	2		gh Pressure			\$	380.00	
			-					
Water at pre	essures hig	her than 20	feet can be i	regulated w	ith the COM	ET E Ty	pe Equilib	orium
Floatvalve.	This valve o	perates effe	ctively at pre	ssures up t	o 150 feet w	ithout d	anger of	
shimmying	, and valve o	opening is e	qual to the fu	ull bore of th	e pipe. Size	es 1¼", 1	1½" and 2	" pipe.
		O T						
E' Type pictu	red with a C	OMET			( and a			
Brass Float a	and Fixed Ar	т	y	. /				
				here and the second		U		
	0							
		0	9					
		Car			C	Tim	)	
		COMET			CO	MET	1	
	44/11.4				1/11.4- 411.0			
	1½" to 4	4" Fixed Float a	and Arm		1/2" to 4" Swiv	elling Fl	oat and Arn	1



A floatvalve regulates the water supplied to stock from the storage tanks. For this important function it must permit at times an inrush of water to the trough for mobs of thirsty sheep or cattle, and yet remain closed without leakage for long periods.

'H' Type pictured with a COMET Brass Float




## WINDMILL PARTS

### WHEEL ASSEMBLY

# **C PATTERN**

WHEEL ASSEM	BLY 8, 10, 12, 14ft		
CODE		QUANTITY	PRICE
COM1001W	8ft Wheel Assembly Less Hub, Bolts & Balance Weights		
COM1001WH	8ft Wheel Assembly Complete, with Hub, Bolts & Balance Weights		
COM1002W	10ft Wheel Assembly Less Hub, Bolts & Balance Weights		
COM1002WH	10ft Wheel Assembly Complete, with Hub, Bolts & Balance Weights		\$ 1,990
COM1003W	12ft Wheel Assembly Less Hub, Bolts & Balance Weights		
COM1003WH	12ft Wheel Assembly Complete, with Hub, Bolts & Balance Weights		
COM1004W	14ft Wheel Assembly Less Hub, Bolts & Balance Weights		\$ 2,450
COM1004WH	14ft Wheel Assembly Complete, with Hub, Bolts & Balance Weights \$2,65		

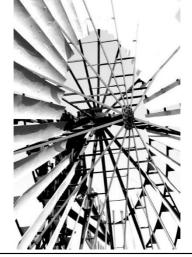

# **D PATTERN**

WHEEL ASSEMBLY 16, 18, 20, 22ft				
CODE		QUANTITY	PRICE	
COM1037W	16ft Wheel Assembly Less Hub, Bolts & E	Balance Weights	\$ 5,390	
COM1037WH	16ft Wheel Assembly Complete, with Hub	16ft Wheel Assembly Complete, with Hub, Bolts & Balance Weights		
COM1038W	18ft Wheel Assembly Less Hub, Bolts & E	\$ 5,400		
COM1038WH	18ft Wheel Assembly Complete, with Hub	\$ 7,200		
COM1039W	20ft Wheel Assembly Less Hub, Bolts & E	\$ 7,200		
COM1039WH	20ft Wheel Assembly Complete, with Hub	\$ 8,700		
COM1040W	22ft Wheel Assembly Less Hub, Bolts & Balance Weights		\$ 8,400	
COM1040WH	22ft Wheel Assembly Complete, with Hub	, Bolts & Balance Weights	\$ 9,900	



WINDMILL TYPE	Mill Wh Dia Foot	eel	No. Sails	No. Arms	No. Inner Rims	No. Middle Rims	No. Outer Rims	No. Brackets	Bracket No.
'C'	6	1.83	12	4	2	-	4	12	0 0
PATTERN	8	2.44	12	4	2	-	4	12	1 2
MILL	10	3.05	18	6	3	-	6	18	1 2
	12	3.66	18	6	3	-	6	18	3 4
	14	4.27	24	8	4	-	8	24	3 4
	16	4.88	24	8	8	-	8	24	3 4
'D'	18	5.49	24	8	8	-	8	24	3 5
PATTERN	20	6.10	24	8	8	8	8	24	3 4 5
	22	6.71	30	10	10	10	10	30	3 4 5
	24	7.32	30	10	10	10	10	30	6 7 8
	27	8.23	36	12	10	10	10	36	6 7 8
	30	9.14	42	14	14	14	14	42	6 7 8



### WINDMILL PARTS

### OVERHAUL KITS — C PATTERN

The Comet 'C' Pattern Mills have earned a wide reputation for great pumping capacity and longer trouble-free service. Extreme sensitivity to changes in wind direction, together with effective governing for safety in storms, means simply that the Comet will outperform any other mill of similar size. Made in five (4) sizes the 8ft to 14ft Comet Mills are direct acting for

better efficiency and great strength. The fewer working parts mean less friction loss than geared mills. The Comet makes more use of the small power available in the prevalent light winds.

The exceptionally strong main casting with integral mast pipe is accurately machined to close tolerances. The unique Comet Hardwood Bearing Bushes make by far the best bearings for the slow speed, heavy duty work of a windmill and a great many of them have been in service for over 30 years.

The cast iron crank with steel pin is shrunk and keyed to the bright steel driving shaft and cannot work loose. Thrust is taken between machined faces of the main casting and wheel hub.

**MAJOR Overhaul Kit 8—14ft** — Driveshaft, Connecting Rod, Crosshead (incl. pin/dowel), Swivel, choice of wood or nylon bearings.

CODE		PRICE
MAA1000	Major Overhaul Packages 8ft	\$ 1,250
MBB1000	Major Overhaul Packages 10ft	\$ 1,260
MCC1000	Major Overhaul Packages 12ft	\$ 1,700
MDD1000	Major Overhaul Packages 14ft	\$ 1,710


**MINOR Overhaul Kit 8 - 14ft** — Connecting Rod, Crosshead (incl. pin/dowel), Swivel, choice of wood or nylon bearings.

CODE		PRICE
MAB1000	Minor Overhaul Packages 8-10ft	\$ 750
MCD1000	Minor Overhaul Packages 12—14ft	\$ 990

REPAIR Kit 8-14ft			
CODE		PRICE	
MAB1034	8-10ft Upper/Lower Turntables complete	\$ 599	
MCD1034	12-14ft Upper/Lower Turntables complete	\$ 699	
MAB1035	8-10ft Inner/Outer Pullout Collars complete	\$ 410	
MCD1035	12-14ft Inner/Outer Pullout Collars complete	\$ 490	
MAB1036	8-10ft Roller Guide complete	\$ 360	
MCD1036	12-14ft Roller Guide complete	\$ 425	



### **PARTS ILLUSTRATION** 8, 10, 12, 14ft C PATTERN WINDMILLS

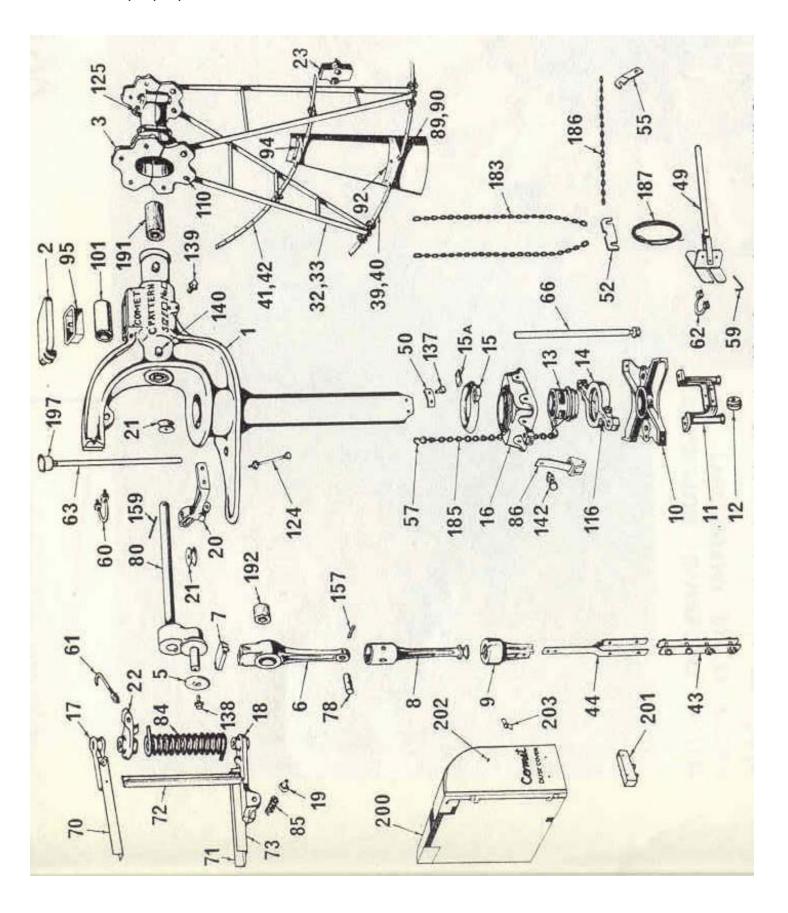



#### LIST OF PARTS 8, 10, 12, 14ft C PATTERN MILLS

1 Main Casting Complete Incl. 2, 50, 95, 137, 139, 140, 191 2 Oil Lid for Main Casting 3 Hub Complete Incl. 125 5 Crank Pin Washer 6 Connecting Rod Complete Incl. 7, 78, 157, 192 7 Oil Lid for Connecting Rod 8 Crosshead Incl. 120 9 Swivel Incl. 120 10 Bottom Guide Complete Incl. 10A 10A Grease Cup for Bottom Guide 11 Roller Guide Complete Incl. 12, 128 12 Rollers for Roller Guide 13 Inner Pullout Collar 14 Outer Pullout Collar Complete Incl. 116 15 Top of Turntable Complete Incl. 15A 15A Oil Lid for Turntable 16 Tower Cap 17 Top Vane Hinge Casting 18 Bottom Vane Hinge Casting Complete Incl. 19, 85 19 Buffer Studs 20 Pullout Bracket Complete Incl. 21, 122 21 Chain Rollers 22 Tension Casting 23 Balance Weights Complete Incl. 126 32 Wheel Arms - Complete Set 33 Wheel Arm - One only 39 Outer Rims - Complete Set 40 Outer Rim - One only 41 Inner Rims - Complete Set 42 Inner Rim - One only 43 Fishplates for joining Mill Rods 44 Connecting Straps for Guide Bar 49 Pullout Lever Complete Incl. 59 50 Stop Bracket on Mast Pipe 52 Equalizing Bar 55 Chain Plate 57 'S' Hooks for Pullout Chain 59 Stop Pin for Pullout Lever 60 'U' Clip for Vane Hinge Rod with Nuts and Washers 61 Tension Bolt with Nuts 62 'U' Clip for Pullout Lever with Nuts and Washers 63 Vane Hinge Rod Incl. 197 66 Pullout Guide Rod with Nut and Lock Washer 69 Vane Frame - Complete Incl. 17, 18, 70, 71, 72, 73 70 Top Vane Angle 71 Stiffening Vane Angle 72 Upright Vane Angle 73 Bottom Vane Angle 78 Crosshead Pin Complete Incl. 157 80 Driving Shaft Complete with Crank, Crank Pin, 5, 138, 159 84 Governor Spring 85 Buffer Spring 86 Latch Spring Complete with Latch 88 Vane Sheet Complete with Galv. Straps 89 Sails - Complete Set similar description used since 1940. 10 Pipe Pullout Bottom Guide Complete Incl. 10A.

90 Sail - One only 91 Outer Sail Brackets - Complete Set 92 Outer Sail Bracket - One only 93 Inner Sail Brackets - Complete Set 94 Inner Sail Bracket - One only 95 Galvanised Oil Box for Main Casting 101 Ring Oiler Tube 105 Galv. Bolts - Sail Brackets to Rims 106 Galv. Bolts - Sail Brackets to Sails 107 Bolts - Lap of Outer Rims 108 Bolts - Inner Rims to Arms at Lap 109 Bolts - Outer Rims to Arms 110 Bolts – Arms to Hub 111 Bolts - Inner Rims to Arms 112 Bolts - Vane Sheet to Vane Angles 113 Bolt - Upright Vane Angle 114 Bolt – Outer End of Vane Angles 115 Bolts - Bottom Guide to Tower 116 Bolts - Outer Pullout Collar 117 Bolts - Tower Cap to Tower 119 Bolts - Pullout Bracket to Main Casting 120 Bolts - Swivel to Guide Bar 121 Bolts - Top Vane Hinge Casting to Angle 122 Bolt - Chain Roller on Pullout Bracket 124 Stay Bolt for Pullout Bracket 125 Clamp Bolts for Hub 126 Bolts - Balance Weights 127 Bolts - Connecting Straps to Mill Rod 128 Bolts - Rollers on Rollerguide 129 Bolt - Chain Roller on Main Casting 137 Set Screws for 50 138 Set Screws for 5 139 Set Screw with Leather Washer - for Oil Well Draining Hole and Oil Level Hole 140 Set Screw for Drive Shaft Bearing Bushes 142 Set Screw for 86 **157** Through Pin for Crosshead Pin 159 Through Pin for Drive Shaft 182 Steel Balls for Turntable 183 Double Pullout Chain Complete Incl. 52 185 Pullout Chain for Vane Complete Incl. 57 186 Check Chain 187 Galv. Pullout Wire 190 Mill Rods 191 Drive Shaft Bearing Bushes (set) 192 Connecting Rod Bearing Bushes 196 Syphon Wicks for Oil Wells 197 Oil Cup for 63 200 Dust Cover Complete Incl. 201, 202, 203. 201 Oil Box in Dust Cover 202 Fastening Bolt for Dust Cover 203 Wing Nut for 202 189 Pullout Winch Complete (Not Available). This was between 1938-1942. If a replacement or any parts are required Part 49 Pullout Lever Complete will be supplied.

Note:- The following parts were used prior to 1940 and are not inter-changeable with Double Chain Pullout Parts of

11 Pipe Pullout Roller Guide Complete Incl. 12, 128.

14 Pipe Pullout Outer Collar Complete Incl. 116 100 Pullout Pipe with Split Pin



## WINDMILL PARTS

# **OVERHAUL KITS — D PATTERN**

**MAJOR Overhaul Kit 16-30ft** — Driveshaft, Connecting Rod, Crosshead (incl. pin/dowel), Swivel, choice of wood or nylon bearings.

CODE		PRICE
MQQ1000	Major Overhaul Packages 16ft	\$ 2,400
MRR1000	Major Overhaul Packages 18ft	\$ 2,600
MSS1000	Major Overhaul Packages 20ft	\$ 2,900
MTT1000	Major Overhaul Packages 22ft	\$ 3,100
MUU1000	Major Overhaul Packages 24ft	\$ 3,600
MVV1000	Major Overhaul Packages 27ft	\$ 3,800
MWW1000	Major Overhaul Packages 30ft	\$ 4,000

**MINOR Overhaul Kit 16 - 30ft** — Connecting Rod, Crosshead (incl. pin/dowel), Swivel, choice of wood or nylon bearings.


CODE		PRICE
MQR1000	Minor Overhaul Packages 16-18ft	\$ 1,790
MST1000	Minor Overhaul Packages 20—22ft	\$ 2,190
MUW1000	Minor Overhaul Packages 24, 27, 30ft	\$ 2,600

REPAIR Kit 16-30ft			
CODE		PRICE	
MQR1000MR	Mastpipe c/w stop brackets 16—18ft	\$ 2,600	
MST1000MR	Mastpipe c/w stop brackets 20-22ft	\$ 3,300	
MUW1000MR	Mastpipe c/w stop brackets 24, 24, 27ft	\$ 3,800	
MQR1000TR	Upper/lower Turntables complete 16—18ft	\$ 1,490	
MST1000TR	Upper/lower Turntables complete 20—22ft	\$ 1,590	
MUW1000TR	Upper/lower Turntables complete 24, 27, 30ft	\$ 1,790	
MQR1000CR	Inner/Outer Pullout Collars complete 16—18ft	\$ 980	
MST1000CR	Inner/Outer Pullout Collars complete 20-22ft	\$ 1,150	
MUW1000CR	Inner/Outer Pullout Collars complete 24, 27, 30ft	\$ 1,480	
MQR1000WR	Thrust Washer complete 16—18ft	\$ 520	
MST1000WR	Thrust Washer complete 20—22ft	\$ 610	
MUW1000WR	Thrust Washer complete 24, 27, 30ft	\$ 680	
MQR1000RR	Roller complete with spindle 16—18ft	\$ 390	
MST1000RR	Roller complete with spindle 20—22ft	\$ 480	
MUW1000RR	Roller complete with spindle 24, 27, 30ft	\$ 780	



### **PARTS ILLUSTRATION**

16, 18, 20, 22ft D PATTERN WINDMILLS

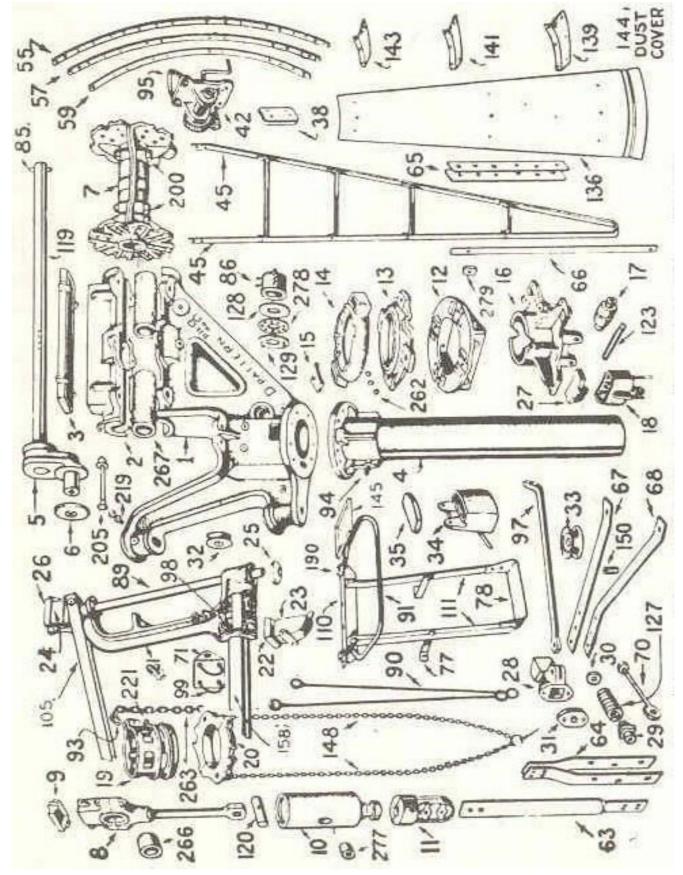

**ONLYUSE GENUINE COMET QUALITY PARTS** 



### LIST OF PARTS

CASTINGS

#### 16, 18, 20, 22ft D PATTERN MILLS

1 Main Casting 2 Bearing Cover on Main Casting 3 Oilbox Lid for Bearing Cover 4 Mast Pipe One-piece Crank and Pin (Fixed on shaft) 6 Crank Pin Washer 7 Hub Casting Clamp-on Type 8 Connecting Rod 9 Oilbox Lid for Conn. Rod (Until 1960) 10 Crosshead 11 Swivel 12 Tower Cap 13 Bottom Part of Ball-Bearing Turntable 14 Top Part of Ball-Bearing Turntable 15 Oilbox Lids for Turntable 16 Bottom Guide for Mast Pipe 17 Rollers for Bottom Guide 18 Oilboxes For Rollers 19 Inner Collar for Pullout 20 Outer Collar for Pullout 21 Vane Hinge Casting 22 Oilbox Lid for 23 23 Bottom Oilbox for Vane 24 Top Oilbox for Vane 25 Self-aligning Washer for Vane 26 Oilbox Lid for 24 27 Oilbox Lid for 18 28 Spring Buffer Casting 29 Buffer Studs 30 Washer on Buffer Bar 31 Buffer Box Flange 32 Chain Roller on Main Casting 33 Chain Roller on Pull-out Bars 34 Oilboxes for Crosshead (Until 1960) 35 Lids for Crosshead Oilboxes 38 Balance Weights 42 Pullout Winch complete **FLAT BAR PARTS** 45 Wheel Arms - Complete Set 46 Wheel Arm - one only Rims - complete set 55 Outer Rims - complete 56 Outer Rim - one only 57 Middle Rims - complete 58 Middle Rim - one only 59 Inner Rims - complete 60 Inner Rim - one only 63 Steel Draw Bar 64 Connecting Straps on Steel Draw Bar

65 Fish Plates joining Mill Rods 66 Guide Bar 67 Top Bar for Pull-out Bracket 68 Bottom Bar for Pull-out Bracket 5 70 Eye Bolt for Spring Buffer 71 Buffer and Chain Plate 73 Check Rod Plate on Vane 74 Vane Straps - inner 74A Vane Straps - inner middle 75 Vane Straps - middle 76 Vane straps - outer 77 Stay for Inspection Frame to MainCasting 78 Foot Plate 105 Vane Stay Straps **ROUND BAR PARTS** 85 Plain Pin through Shaft on Hub 86 Thrust Collar 89 Vane Hinge Rod 90 Check Rod for Vane 91 Guard Rail for Inspection Frame 93 Connecting Link for Pull-out Collars 94 Check Stud on Mast Pipe (Until 1959) 95 "U" Clips for Winch 97 Pull-out Bracket Stay 98 "U" Bolts for Vane Hinge Casting 99 "U" Bolts for 71 ANGLE STEELPARTS 110 Support Angle for Inspection Frame 111 Side Angles for Footplate 112 Inspection Frame Complete POLISHED STEEL PARTS 119 Driving Shaft (fitted with Crank & Pin) 120 Crosshead Pin 121 Cotter Pin for Crosshead Pin 123 Axles for Rollers on Bottom Guide SPRING STEELPARTS 127 Buffer Spring 128 Front Thrust Washer 129 Back Thrust Washer 130 Thrust Washer Complete (Front Back & 54 Balls with Cage) **GALVANISED IRONPARTS** 134 Vane Sheet Complete 135 Sails - complete set 136 Sail - one only 137 Sail Brackets - complete set 138 Outer Sail Brackets - complete set 139 Outer Sail Bracket - one only 140 Middle Sail Brackets - complete set




### **PARTS ILLUSTRATION** 24, 27, 30ft D PATTERN WINDMILLS

#### HOW TO ORDER GENUINE COMET SPARE PARTS

When ordering GENUINE spare parts it is important to state:

1. Part Number 2. Name of Part 3. Size of Mill 4. Registered Serial Number of Mill\* \* When any improvements are made in Comet Mills a proper record is kept in our Office. The alterations are recorded against the size and serial numbers of the mills that have the alterations, and also the period over which the alterations hold good. Delay is avoided if the serial number of the mill is supplied when ordering genuine spare parts which also ensures the genuine parts are correct. The size and registered serial number of COMET Mills are found on the side of the main casting, the vane sheet and driving shaft (crank).

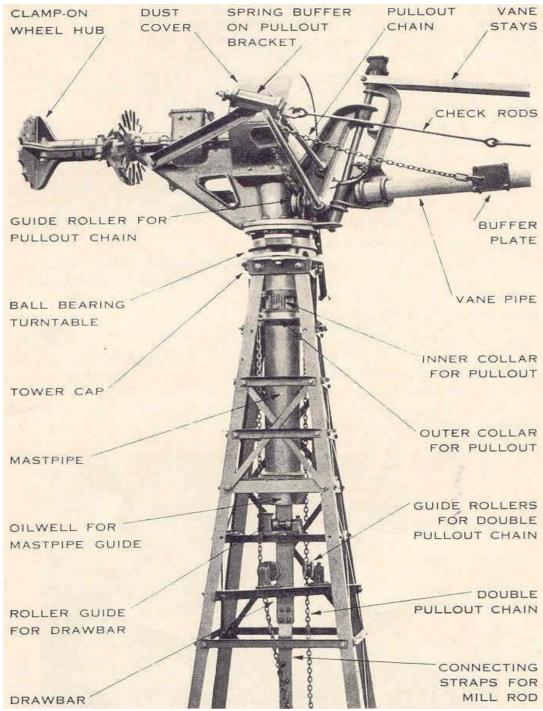


D' Pattern Mill, less wheel and vane. Note the totally enclosed design, simplicity of construction and great strength of all components.

**ONLY USE GENUINE COMET QUALITY PARTS** 



### **PARTS ILLUSTRATION** 24, 27, 30ft D PATTERN WINDMILLS

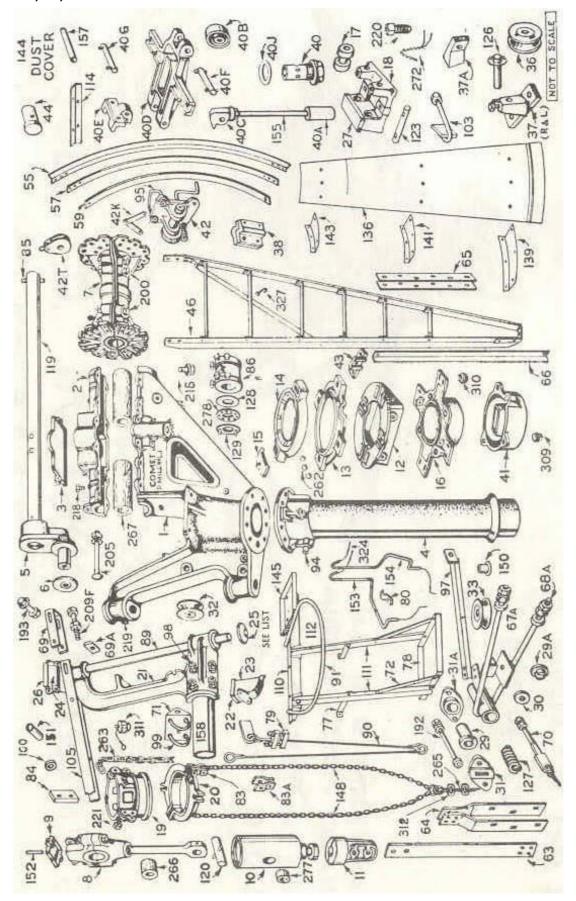



### LIST OF PARTS 24, 27, 30ft D PATTERN MILLS

#### **Product Codes:**

MUU-24'ONLY; MVV-27'; MWW-30'ONLY; MVW-27', 30'; MUW-24', 27' & 30'

#### CASTINGS

1 Main Casting 2 Bearing Cover on Main Casting 3 Oilbox Lid for Bearing Cover 4 Mast Pipe 5 One-piece Crank and Pin (Fixed on shaft) 6 Crank Pin Washer 7 Hub CastingClamp-on Type 8 Connecting Rod 9 Oilbox Lid for Conn. Rod (Until 1960) 10 Crosshead 11 Swivel 12 Tower Cap 13 Bottom Part of Ball-Bearing Turntable 14 Top Part of Ball-Bearing Turntable 15 Oilbox Lidsfor Turntable 16 Bottom Guide for Mast Pipe 17 Rollers for Roller Guide 18 Roller Guide Spindle Bearing with Oilbox 18A Packing Pieces for Tower Rails 19 Inner Collar for Pullout - right half 19A Inner Collar for Pullout - left half 20 Outer Collar for Pullout 21 Vane Hinge Casting 22 Oilbox Lid for 23 23 Bottom Oilbox for Vane 24 Top Oilbox for Vane 25 Self-aligning Washer for Vane (27/30') 26 Oilbox Lid for 24 27 Oilbox Lid for 18 28 Spring Buffer Casting (27/30') 28A Tubular Spring Buffer Body with Pullout Bracket Arms, 67A and 68A, and Chain Guard, 146, welded on (24') 29 Buffer Studs 29A Washer for Spring on Eyebolt 30 Washer on Buffer Bar 31 Buffer Box Flange-front 31A Buffer Box Flange - back (24') 32 Chain Roller on Main Casting 33 Chain Roller on Pull-out Bars 36 Guide Roller for Pull-out chain 37 Guide Roller Brackets - 1 R.H., 1 L.H 37A Packing Piece for Guide Roller Rail 38 Balance Weights for Wheel 39 Top Distance Casting between Chain Roller and Top Pullout BracketArm (27/30') 39A Bottom Distance Casting between Chain Roller and Bottom Pullout Bracket Arm (27/30') 40 Oil Pump Displacer Cylinder 40A Oil Pump Plunger 40B Oil Pump Cam Roller

40C Oil Pump Outlet Casting (Integral with Part 155 since 1952) 40D Oil Pump Rocker Arm & Distributor 40E Oil Pump Bracket for Rocker Arm 40F Oil Pump Knuckle Pins 40G Oil Pump Hinge Pin 40J Oil Pump Washer for Cylinder 41 Oil Well for Mast Pipe 42 Pullout Winch complete (FrameBarrel, Worm, Handle and Rope) 42A Winch Frame Casting for Pullout 42B Barrel of Winch 42C Worm 42D Handle 42K Rope Anchor Links above Winch 42R Wire Ropeon Winch 42S Baseplate for Winch (44'x 30 Towers Up) 42T Pulley Block for Winch 43 Brackets on Tower for Guide Bars (Integral with Guide Bar from 1960) 44 Balance Weight for Vane Pipe FLAT BAR PARTS 45 Wheel Arms - Complete Set 46 Wheel Arm – one only 54 Rims - complete set 55 Outer Rims - complete 56 Outer Rim - one only 57 Middle Rims – complete 58 Middle Rim - one only 59 Inner Rims - complete 60 Inner Rim - one only 63 Steel Draw Bar 64 Connecting Straps on Steel Draw Bar 65 Fish Plates joining Mill Rods 66 Guide Bars for Outer Collar 67 Top Bar for Pull-out Bracket (27/30') 68 Bottom Bar for Pull-out Bracket (27/30') 69 'U' Strap for Adjusting Vane Stays. (24' until 1952; 27/30' until 1953) 70 Eye Bolt for Spring Buffer 71 Buffer and Chain Plate 72 Flat Braces for Footplate 73 CheckRod Plate on Vane (welded on) 74 Vane Straps --inner 74A Vane Straps - inner middle 75 Vane Straps - middle 76 Vane straps -outer 77 Stay for Inspection Frame to Main Casting - long 77A Stay for Inspection Frame to Main Casting - short 78 Foot Plate



#### LIST OF PARTS 24, 27, 30ft D PATTERN MILLS Product Codes:

MUU-24'ONLY; MVV-27'; MWW-30'ONLY; MVW-27', 30'; MUW-24', 27' & 30'

79 Shackle on Check Rod to Vane 27/30' onlyuntil 1953 80 Clip for CrossheadOil Tubes 83 Connecting Links - Chain to Inner Collar 83A Connecting Links - Chain to Outer Collar 84 Inner Collar Guide Key 105 Vane Stays ROUND BAR PARTS 85 Plain Pin through Shaft on Hub 86 Thrust Collar 89 Vane Hinge Rod 90 Check Rod for Vane 91 Guard Rail for Inspection Frame, Welded to Support Angle 93 Long Link – Pullout Collar to Conn. Link 94 Check Stud on Mast Pipe (Until 1959) 95 'U' Clips for Winch 97 Pull-out Bracket Stay 98 'U' Bolts for Vane Hinge Casting 99 'U' Bolts for 71 100 Spacer between Connecting Links 103 Hook Bolts for 107A ANGLE STEEL PARTS 107 Support Rails for Roller Guide 107A Support Rails for Guide Roller 110 Support Angle for Inspection Frame 111 Side Angles for Footplate 112 Inspection Frame Complete 114 Stiffening Angle for Dust Cover POLISHED STEEL PARTS 119 Driving Shaft (fitted with Crank & Pin) 120 Crosshead Pin 121 Cotter Pin for Crosshead Pin 123 Spindles for Roller Guide 126 Axles for Guide Rollers SPRING STEEL PARTS 127 Buffer Spring 128 Front Thrust Washer 129 Back Thrust Washer 130 Thrust Washer Complete (Front Back & Balls with Cage) GALVANISEDIRONPARTS 134 Vane Sheet Complete 135 Sails - complete set 136 Sail - one only 137 Sail Brackets - complete set 138 Outer Sail Brackets - complete set 139 Outer Sail Bracket - one only 140 Middle Sail Brackets - complete set 141 Middle Sail Bracket - one only 142 Inner Sail Brackets - complete set 143 Inner Sail Bracket - one only 144 Dust Cover (With Oilbox from 1960) 145 Tool Tray

146 Chain Guard below 33 **TUBE PARTS** 150 Ferrule for Chain Roller 151 Spacer on Vane Stays 152 Oil Tube for Conn. Rod 153 Oil Tube for Crosshead - R.H 154 Oil Tube for Crosshead - L.H 155 Oil Pump Tube for Oil Plunger 157 Distance Pipe for Dust Cover 158 Vane Pipe **BOLTS FORWHEEL** 160 Arms to Hub Casting 161 Inner Rims to Arms 162 Middle Rims to Arms 163 Laps of Middle Rims 164 Outer Rims to Arms 165 Laps of Outer Rims 166 Sail Brackets to Rims 167 Sail to Sail Brackets **BOLTS FOR MILL HEAD & VANE** 170 Roller Guide Support Rails to Tower 171 Footplate Stays to Main Casting 172 Footplate & Stays to Frame 172A Footplate Braces to Footplate 172B Footplate Braces to Side Angles 173 Pullout Collar to Connecting Links 174 Footplate Frame to Support 175 Guide Bar Bracket to Tower Rail 176 Guide Bars to Bottom Guide 177 Guide Bars to Guide Bar Bracket (Until 1960) 178 Inner Pullout Collar 179 Inner Pullout Collar Dowel Bolt 179A Inner Pullout Collar Dowel Bolt 180 Vane Straps and Stays to Pipe 181 Bottom Guide to Tower 182 Pullout Collar (Outer) 183 Connecting Straps to Draw Bar 184 Vane Sheet to Straps 185 Oil Well to Bottom Guide 186 Guide Roller Bracket to Support Angle 187 Chain Roller on Pull-out 188 Clamp Bolts - Vane Straps and Sheet to Pipe 189 Top Bracket Bar to Buffer Casting (27/30') 189A Bottom Bracket Bar to Buffer Casting (27/30') 191 Footplate support to Main Casting 192 Spring Buffer Body to Flanges (24') 192A Spring Buffer Body to Flange (27/30') 193 Vane Stays to Hinge Casting 194 Bottom Bar to Buffer Casting (27/30') 194A Stay to Buffer 195 Bottom Bar to Main Casting (27/30') 195A Stay to Main Casting 196 Top Bar to Buffer Casting (27/30') 196A Top Bar to Main Casting (27/30')



### LIST OF PARTS 24, 27, 30ft D PATTERN MILLS

#### **Product Codes:**

MUU-24'ONLY; MVV-27'; MWW-30'ONLY; MVW-27', 30'; MUW-24', 27' & 30'


197 Main Swivel 198 Main Bearing Cap - Long 198A Main Bearing Cap-Short 199 Top Distance Casting (39) to Angle (27/30') 199A Bottom Distance Casting (39A) to Angle (27/30') 200 Hub Casting 201 Connecting Rod 202 Bolts for Tool Tray 204 Connecting Straps to Mill Rod 205 Crank Pin Washer to Crank 206 Tower Cap to Legs 207 Turntable to Tower Cap 208 Chain Roller on Main Casting 209 Fish Plates 209F Adjusting Screw for 69 (24' until 1952) (27/30' until 1953) 280 Mast Pipe to Main Casting 280A Mast Pipe to Main Casting - Fitted 287 Hinge Casting to Top Oilbox 288 Hinge Casting to Bottom Oilbox 289 Connecting Links to Long Link 325 Dust Cover to Main Casting 326 Dust Cover to Main Casting 328 Balance Weights on Wheel 328A Balance Weight on Vane 329 Roller Guide Castingto Rails 330 Chain Roller Bracket to Pullout Bracket (27/30') LOOSE NUTS 211 Adjusting Screws for Vane (top) 212 Lock Nutfor 209F 213 Buffer Eye Bolt 213A Nuts for Arms 67A & 68A (24') 214 Nuts for 98 214A Nuts for 99 SET SCREWS 215 Oil Draining Plug 216 Guide Roller Axle 216A Oil Level Set Screw 217 Thrust Collar 218 Top Cover to H. W. Bearings 219 Vane Hinge Rod Adjustor 220 Roller Guide Spindle 220A Roller Guide Spindle Set Screws with Oil Hole 221 Inner Collar Locking Screw 319 Set Screws for 318 (from 1960) SPLIT PINS 230 Oilbox Cover on Top Vane Hinge

231 Oilbox Cover for BearingCover 232 Oilbox Cover for Bottom Vane Hinge 233 Oilpump Cam Roller 234 Eye Bolton Buffer 235 Guide Roller Axles 236 Roller Guide Spindles 236A Conn. Rod Oilbox Lid (until 1960) 237 Turntable Oilbox Lid **PLAIN WASHERS** 235A Washers for 235 239 Crank Pin Bolt Washer 242 Distance Washer for Eye Bolt 331 Washer under Chain Roller LOCK WASHERS FOR WHEEL BOLTS For Galvd. Bolts through Sails and Brackets. For Bolts through Rims and Arms For Bolts through Arms ans Hub Casting (Most of the other bolts in mill also have lock washers) SUNDRIES 148 Lower Pullout Chains 229 Locking Wire for 280 & 280A 261 Steel Balls for Thrust Washer 262 Steel Balls for Turntable 263 Pull-out Chain from Vane 264 Wire for Oil Cup Lid Hinges 265 Pull-out Wire Rope 266 Bearing Bush for ConnectingRod 267 Bearing Bush for Driving Shaft 269 Mill Rods 272 Syphon Wicks for Oil Boxes - completeset 273 Syphon Wicks - Roller Guide Oilbox 274 Syphon Wick for Conn. Rod 276 Split Link for Pullout Chain 277 Bushes for Crosshead 278 Ball Cage for Thrust Washer 309 Filling Plug - Mast Pipe Oil Well 310 Draining Plug - Mast Pipe Oil Well 311 Brass Plug for Inner Collar Oilbox 312 Wire Rope Clips for 265 312A Thimbles for 265 315 Leather Washer for 215 318 Stop for Mast Pipe (from 1960) 324 Long Syphon Wicks for Crosshead Oil Tubes 327 Hook Bolts on Wheel Arms 337 Leather Washer for Oil Level Plug 338 Leather Washer between Hub and Main Casting

339 Leather Washer for 310



# POLYPRO COLUMN AND RODS

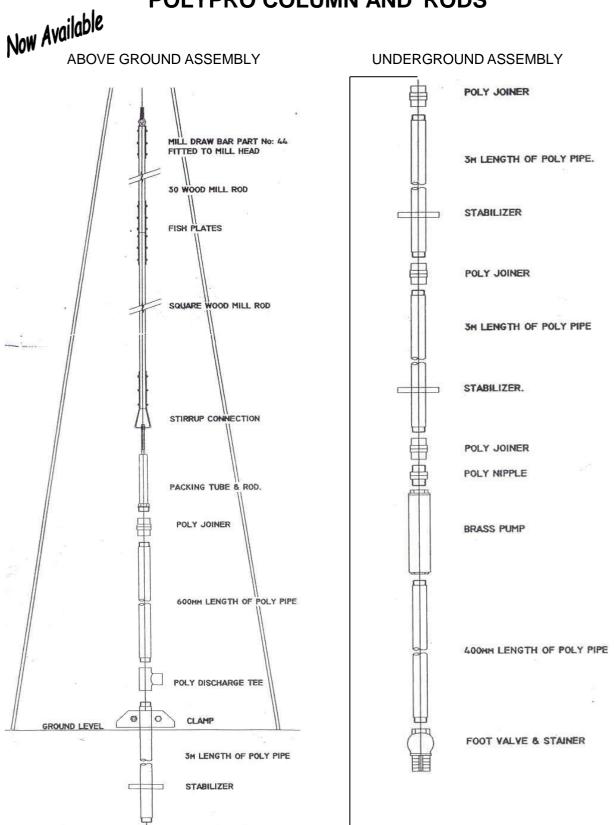

6/8 Ft Mills use 11/2" delivery column and 11/4" Suction Pipe. 10/12 Ft Mills use 2" delivery column and 11/4" Suction Pipe. 14 Ft Mills use 2" delivery column and 1½" Suction Pipe. Hollow Polyrods are for 6/8 FtMills. Solid Steel reinforced rods are for 10/12/14 Ft Mills. Fittings vary in size to match up rods which are matched for length with columns.



# WINDMILL PARTS PULL ROD SPARE PARTS

	WINDMILL PU	LL ROD SPARE PARTS		
	CODE		WEIGHT PRIC	CE
	WMPR30SP1	Steel Pull Rod; 12BSW MM; 3M 3.05m L x 0.013m OD	2.94kg POA	L.
	WMPR60SP1	Steel Pull Rod; 12BSW MM; 6M 6.05m L x 0.013m OD	6kg POA	L.
	WMPR60SP2	O'Ring; BS113 (For 12BSW; St'l RF-PF	PROD) POA	
	WMPR3016SP1	Steel Pull Rod; 58BSW MM; 3M 3.05m L x 0.016m OD	POA	
	WMPR6016SP1	Steel Pull Rod; 58BSW MM; 6M 6.05m L x 0.016m OD	POA	
	WMPR6016SP2	O'Ring; BS116 (For 58BSW; St'l RF-PF	PROD) POA	L.
	Vill Columns Column sockets Rubber Stabilisers	<ul> <li>columns and</li> <li>Replace old procedures</li> <li>Steel reinfor sealed, pull</li> <li>Rubber stat Polpro mill o steady the p</li> <li>Standard le Columns in threads</li> <li>Windmills on</li> <li>Pull-rod conto eliminate column</li> </ul>	em with non rusting pipe d pull-rods I system with standard rced, compressed twin rods reduce loss of strok piliser plates push onto column to centralise and pipe ngths and simple adaptor BSP, Pull-rods in BSW perate quietly nections are long and slin chaffing of the pump	rs.
·		Deep bore F     Deep bore F     Dirced Pull-rods     pin1/2"and 5/8"	Pull-rods use brass socke	ets



# WINDMILL COLUMNS

### Polpro Heavy Duty Mill Pipe Columns

	Heavy Duty Mill Pipe Columns			
CODE			WEIGH	T PRICE
WM3204	Mill Column; PP; 32BSPM X 400mm 0.4m L x 0.043m OD		0.3kg	POA
WM3206	Mill Column; PP; 32BSPM X 600mm 0.6m L x 0.043m OD		0.4kg	POA
WM3212	Mill Column; PP; 32BSPM X 1200mn 1.2m L x 0.043m OD	n	0.7kg	POA
WM3230	Mill Column; PP; 32BSPM X 3000mn 3m L x 0.043m OD	n	1.6kg	POA
WM3260	Mill Column; PP; 32BSPM X 6000mn 6m L x 0.043m OD	n	3.2kg	POA
WM4004	Mill Column; PP; 40BSPM X 400mm 0.4m L x 0.049m OD		0.3kg	POA
WM4006	Mill Column; PP; 40BSPM X 600mm 0.6m L x 0.049m OD		0.5kg	POA
WM4012	Mill Column; PP; 40BSPM X 1200mn 1.2m L x 0.049m OD	n	0.9kg	POA
WM4030	Mill Column; PP; 40BSPM X 3000mn 3m L x 0.049m OD	n	2.1kg	POA
WM4060	Mill Column; PP; 40BSPM X 6000mn 6m L x 0.049m OD	n	4.2kg	POA
WM5004	Mill Column; PP; 50BSPM X 400mm 0.4m L x 0.061m OD		0.5kg	POA
WM5006	Mill Column; PP; 50BSPM X 600mm 0.6m L x 0.061m OD		0.8kg	POA
WM5012	Mill Column; PP; 50BSPM X 1200mn 1.2m L x 0.061m OD	n	1.5kg	POA
WM5030	Mill Column; PP; 50BSPM X 3000mn 3m L x 0.061m OD	n	3.8kg	POA
WM5060	Mill Column; PP; 50BSPM X 6000mn 6m L x 0.061m OD	N	7.1kg	POA
WM7530	Mill Column; PP; 75BSPM X 3000mn 3m L x 0.088m OD	n	8.5kg	POA
WM7560	Mill Column; PP; 75BSPM X 6000mn 6m L x 0.088m OD	n	16.9kg	POA
Column	s Sockets to Suit Mill Pipe Colun	ns		
CODE		WEIGHT	PRICE	
WMSS40	Column Socket; PP-SS; 40BSPF 0.14m L x 0.063m OD	0.27kg	POA	× 1

duct tape

*	

	Columns	Stabiliser			_
······································	CODE		WEIGHT	PRICE	
8	WM15040	Mill Coll Stabiliser; Rubber 150mm—40BSP 0.15m Dia x 0.012m W	0.23kg	POA	
	WM15050	Mill Coll Stabiliser; Rubber 150mm—50BSP 0.5m Dia x 0.012m W	0.2kg	POA	

0.33kg

POA

POA

Column Socket; PP-SS; 50BSPF 0.14m L x 0.075m OD

Column Socket Short; SS; 75BSPF x 75mm 0.075m L x 0.1m OD

WMSS50

WMSS75S



### **PULL RODS**

#### **Medium Depth Pull-Rods**

CODE		WEIGHT	PRICE
WMPP30MD	Pull Rod; Med Depth– PP; 12BSW MF; x 3m 3m L x 0.027m OD	1.35kg	POA
WMPP60MD	Pull Rod; Med Depth– PP; 12BSW MF; x 6m 6m L x 0.027m OD	2.6kg	POA
WMPP3016MD	Pull Rod; Med Depth– PP; 5/8BSW MF; x 3m 3m L x 0.033m OD	2.2kg	POA
WMPP6016MD	Pull Rod; Med Depth– PP; 5/8BSW MF; x 6m 6m L x 0.033m OD	4.25KG	POA
		·	

Thick sectioned Polypropylene Pull-Rod suited to depth of 21m. Threaded internally to  $\frac{1}{2}$ " or  $\frac{5}{6}$ " BSW and with a long stainless steel threaded connecting rod in one end (M&F).

Heavy Duty Pull Rods						
CODE		WEIGHT	PRICE			
WMPR30	Pull Rod; Steel Reinf– PP; 12BSW MF; x 3m 3.05m L x 0.027m OD	4.35kg	POA			
WMPR60	Pull Rod; Steel Reinf– PP; 12BSW MF; x 6m 6.05m L x 0.027m OD	8.49kg	POA			
WMPR3016	Pull Rod; Steel Reinf– PP; 58BSW MF; x 3m 3.05m L x 0.034m OD		POA			
WMPR6016	Pull Rod; Steel Reinf– PP; 12BSW MF; x 6m 6.05m L x 0.034m OD		POA			

Heavily steel reinforced plastic sheathed pull-rod suited to depth of 60m. With brass threaded ends and o-ring seals. Provides a corrosion protected pull-rod (M&F).

#### **Medium Depth Rod Adaptors**

½" BSWM	CODE		WEIGHT	PRICE
72 DOWIN	WMA12M110	Pull Rod Adaptor; MD DTH; 12BSW MM x110mm 0.11m L x 0.013m OD	0.09kg	POA
	WMA16M130	Pull Rod Adaptor; MD DTH; 5/8BSW MM x 110mm 0.13m L x 0.016m OD	0.16kg	POA
	WMA16B	Mill Rod Adaptor; Brass; 12BSWF x 58BSWF		
		0.055m L x 0.03m OD	0.19KG	POA
		Medium Depth Pull-Rods. These adaptors provion 2/2" (12mm) BSW male or female thread and to hread.		m)
	Heavy Duty	Rod Adaptors		
	CODE		WEIGHT	PRICE
'BSWF	WMA12M Pu	III Rod Adaptor; SS; 12BSW MM x 50mm		

0.05m L x 0.013m OD

0.055m L x 0.03m OD

0.055m L x 0.034m OD

0.055m L x 0.025m OD

 5/8" BSWF
 WMA12M

 5/8" BSWF
 WMA16B

 1/2" BSWM
 WMA21B

WMA58B

1⁄2" BSWM

Sectioned

Pull-Rod End with

Sectioned View

**Pull-Rod** 

End with BSWF

1/2" BSWF

5∕8" BSWF

**BSW F** 

View

Available in

1/2"

Mill Rod Adaptor; Brass; 12BSWF x 58BSWF

Mill Rod Adaptor; Brass; 12BSWF x 12BSWF

Mill Rod Adaptor; Brass; 58BSWF x 58BSWF

POA

POA

POA

POA


0.04kg

0.19kg

0.13kg

0.13kg



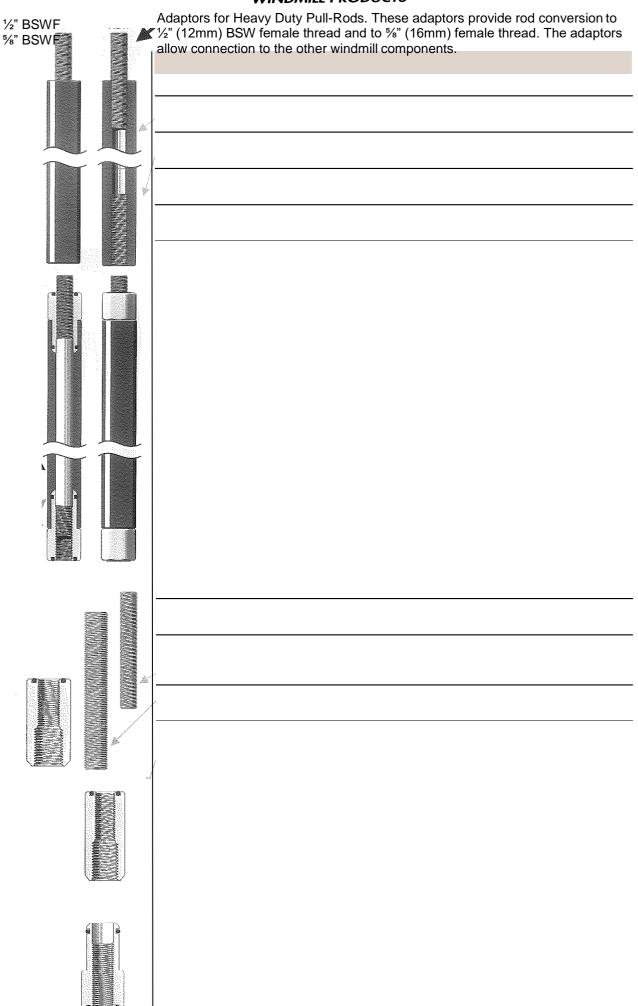



### MILL RODS & CONNECTIONS Prices exclusive of GST and Freight

GALVANIS	ED FISHPLATES WITH NUTS & BOLTS	
CODE		PRICE
COM1214	No. 1 Galvanised Fishplates	\$ 19.50
COM1215	No. 1 Galvanised Fishplates	\$ 25.00
COM1216	No. 1 Galvanised Fishplates	\$ 26.50
COM1217	No. 1 Galvanised Fishplates	\$ 42.00
STIRRUP (	CONNECTION WITH NUTS & BOLTS	
CODE		PRICE
COM1218	No. 1 38mm — 11/2 x 1/2" Hole	\$ 58.00
COM1219	No. 1 38mm — 1½ x 5/8" Hole	\$ 66.00
COM1220	No. 2 50mm — 2 x %" Hole	\$ 72.00
COM1221	No. 3 65mm — 21/2 x 5/8" Hole	\$ 78.00
COM1222	No. 3 65mm — 21/2 x 3/4" Hole	\$ 94.00
COM1223	No. 4 75mm — 3 x ¾" Hole	\$ 122.00
COM1224	No. 4 75mm — 3 x 1/8" Hole	\$ 128.00
SCREWED	PUMPROD COUPLINGS	
CODE		PRICE
COM1225	1/2" Whitworth Brass Pumprod Coupling	\$ 16.00
COM1226	5∕s" Whitworth Brass Pumprod Coupling	\$ 18.00
COM1227	<sup>3</sup> ⁄4" Whitworth Brass Pumprod Coupling	\$ 20.00
Keieper R	INGSAFOR BALASJOINTS Coupling	\$ 23.00
<b>CORE</b> 229	1" Whitworth Brass Pumprod Coupling	<b>\$ 2906</b>
COM1370	No. 2 Steel Keeper Ring	\$ POA
COM1330	Knö.x3⁵Śĭt&eaperaeByeenperpage Coupling	\$ 1460,40
COM1372	Knö.X43/Siteenee Epermaned Coupling	\$ <del>2</del> 000
COM1373	Ktő.x43/4ïBBBBBB FKBBBBBC Kingypling	\$ 22040
COM1374	Ktö.x2 <sup>7</sup> /BirBhzeskeeppermangoupling	\$ 35:00
COM1375	Knö.x31BBringer Release Releaser Re Releaser Releaser Rele	\$ 33.00
COM1375	kto.x47birBrzeskeupperedregoupling	\$ 42.00
COM1379	kkö.x41 HBrBsor Zurkerose Runging	\$ 49.00
COM1237	%" x 1" Brass Pumprod Coupling	\$ 38.00







# **PUMPRODS, JOINTS & CONNECTIONS**

#### STEEL PUMPRODS

5

PRICE
ex GST
6164.00
\$1 <b>94</b> .00
5217.00
\$154.00
\$172.00
5196.00
1" \$


CODE	DESCRIPTION	SIZE	
COM1248	45mm x 25mm x 6.5m Hardwood Pumprod / No 2 Steel Ball Joints	1¾" x 1	\$174.00
COM1250	45mm x 32mm x 6.5m Hardwood Pumprod / No 3 Steel Ball Joints	1¾" x 1¼"	\$196.00
COM1252	50mm x 40mm x 6.5m Hardwood Pumprod / No 4 Steel Ball Joints	2 x 1½"	\$221.00
COM1254	65mm x 40mm x 6.5m Hardwood Pumprod / No 4 HD Steel Ball Jnts	2½" x 1½"	\$246.00

HARDWO	OD PUMPRODS WITH BRONZE BALL JOINTS		
CODE	DESCRIPTION	SIZE	
COM1256	45mm x 25mm x 6.5m Hardwood Pumprod / No 2 Bronze Ball Joints	1¾" x 1	\$ 280.00
COM1258	45mm x 32mm x 6.5m Hardwood Pumprod / No 3 Bronze Ball Joints	1¾" x 1¼"	\$ 310.00
COM1260	50mm x 40mm x 6.5m Hardwood Pumprod / No 4 Bronze Ball Joints	2 x 1½"	\$ 340.00
COM1262	65mm x 40mm x 6.5m Hardwood Pumprod / No 4 HD Bronze Ball Jnts	2½" x 1½"	\$ 350.00



# **PUMPRODS, JOINTS & CONNECTIONS**

	BOX AND	PIN JOINTS FOR PIPE PUMPRODS		I	EX GST
H		No.4 Box and Pin Screwed Joint (Weld No.4 HD Box and Pin Screwed Joint (W	,		POA POA
1000	BOX AND	PIN PLUNGER ROD CONNECTIONS			
		No.4 Box and Pin Plunger Rod Connect No.4 Box and Pin Plunger Rod Connect			POA POA
	BOX AND	PIN PUMPROD TOP END CONNECTIO	NS		
		No.3 Box and Pin Top End Connection No.4 Box and Pin Top End Connection			POA POA
11	STEEL BA	LL JOINTS FOR WOOD PUMPROD			
U	COM1311 COM1312	No 2 Steel Ball Joint with Galvanised Ri No 3 Steel Ball Joint with Galvanised Ri No 4 Steel Ball Joint with Galvanised Ri No 4 HD Steel Ball Joint with Galvanise	vets vets	\$ \$ \$ \$	160.00 180.00 210.00 220.00
-	BRONZE E	BALL JOINTS FOR WOOD PUMPROD			
(C)	COM1315 COM1316	No 2 Bronze Ball Joint with Copper Rive No 3 Bronze Ball Joint with Copper Rive No 4 Bronze Ball Joint with Copper Rive No 4 HD Bronze Ball Joint with Copper	ts ts	\$ \$ \$ \$ \$	210.00 240.00 280.00 310.00
	STEEL BA	LL JOINTS FOR STEEL PUMPRODS			
	COM1319	No 2 Steel Ball Joint (Weld On) No 3 Steel Ball Joint (Weld On) No 4 Steel Ball Joint (Weld On)	Solid (bar) Solid (bar) Solid (bar)	\$ \$ \$	120.00 140.00 160.00
ALC.	STEEL BA	LL JOINTS FOR STEEL PUMPRODS			
100 - 1001	COM1322 COM1323	No 2 Steel Ball Joint (Weld On) No 3 Steel Ball Joint (Weld On) No 4 Steel Ball Joint (Weld On) No 4 HD Steel Ball Joint (Weld On)	Pipe Pipe Pipe Pipe	\$ \$ \$ \$ \$	120.00 140.00 160.00 180.00
11	BRONZE I	FORK CONNECTIONS			
U	COM1326 COM1327 COM1328 COM1329	No 2 Bronze Fork Connection Tapped No 2 Bronze Fork Connection Tapped No 3 Bronze Fork Connection Tapped No 3 Bronze Fork Connection Tapped No 4 Bronze Fork Connection Tapped No 4 Bronze Fork Connection Tapped 1	ય" Whit. 4" Whit. ૪" Whit. ૪" Whit.	\$ \$ \$ \$ \$ \$ \$ \$ \$	200.00 210.00 220.00 240.00 280.00 290.00





### **PIPE AND CASING CLAMPS**

DESCRIPTION



CODE DESCRIPTION		
COMBINED PIPE & CASING CLAMP	Size	PRICE
	Inch	ex GST
COM1450 125mm x 32mm Combined Pipe & Casing Clamps	5 x 1¼"	\$ 280.00
COM1451 125mm x 40mm Combined Pipe & Casing Clamps	5 x 1½"	\$ 290.00
COM1452 125mm x 50mm Combined Pipe & Casing Clamps	5 x 2"	\$ 280.00
COM1453 125mm x 65mm Combined Pipe & Casing Clamps	5 x 2½"	\$ 290.00
COM1454 125mm x 80mm Combined Pipe & Casing Clamps	5 x 3"	\$ 290.00
COM1455 150mm x 32mm Combined Pipe & Casing Clamps	6 x 1¼"	\$ 300.00
COM1456 150mm x 40mm Combined Pipe & Casing Clamps	6 x 1½"	\$ 300.00
COM1457 150mm x 50mm Combined Pipe & Casing Clamps	6 x 2"	\$ 300.00
COM1458 150mm x 65mm Combined Pipe & Casing Clamps	6 x 2½"	\$ 300.00
COM1459 150mm x 80mm Combined Pipe & Casing Clamps	6 x 3"	\$ 300.00

The two larger castings of this 3-piece clamp are rested on and clamped to the top of the bore casing and the column pipe is then centrally clamped in the upper portion. Thus the bore is almost completely covered. The sizes for 5 or 6" casing take  $1\frac{1}{4}$ ,  $1\frac{1}{2}$ , 2,  $2\frac{1}{2}$  and 3" pipe.

HEAVY PIPE CLAMP (Max. Load 150M) Cast Iron and Steel		
COM1460 50mm Heavy Pipe Clamp	2"	\$ 260.00
COM1461 65mm Heavy Pipe Clamp	<b>2</b> ½"	\$ 270.00
COM1462 80mm Heavy Pipe Clamp	3"	\$ 280.00

These exceptionally strong clamps are made in three sizes for 2, 2½ and 3" pipe. The cast iron gripping blocks are bored and grooved to provide a maximum hold on the pipe and are supported by two pieces of heavy angle steel. The angles are provided with holes for attaching to a foundation if necessary.

	CAST STEEL PIPE OR CASING CLAMP		
	COM1463 90mm Cast Steel Pipe Clamp	<b>3½</b> "	\$ 230.00
	COM1464 100mm Cast Steel Pipe Clamp	4"	\$ 270.00
	COM1465 125mm Cast Steel Pipe Clamp	5"	\$ 290.00
(asses)	COM1466 150mm Cast Steel Pipe Clamp	6"	\$ 350.00

These ribbed Cast Steel Clamps have the advantage of great strength with lightness, and are particularly suitable for supporting long pipe or casing pump delivery columns. The internal annular bearing strips are ground to fit the column and provide an exceptional non-slip grip. Made for  $3\frac{1}{2}$  pipe, 4, 5 and 6" casing.



#### COMET BORE PUMP BOOSTER

More water can be pumped from new or old bores by the use of our Comet Bore Pump Booster. The Booster seals off the top of a bore, allowing a partial vacuum to be created within the casing. The result is an increase of up to 33% in the capacities of bore and pump. Made in sizes to fit 4, 5 and 6 inch casing. POA.





# **CONTACT DETAILS:**

# COMET WINDMILLS AUSTRALIA PTY LTD

### **PO BOX 340**

**MACKSVILLE NSW 2447** 

# PH: 02 6568 3711 FAX: 02 6568 3722

email: sales@cometwindmills.com.au web: www.cometwindmills.com.au



The Comet Windmill, an icon of inland Australia. Windmills are scattered all over the Australian continent like tireless sentinels standing guard over precious water supplies that give and sustain life. The Comet is a fitting symbol of the Australian Outback representing perseverance and sustainability in a harsh environment, a sense of timelessness, and the contribution to the Outback that remains superior....that is why Comet is still....Australia's Leading Mill.

